

SOHO S-4830 - Specification Sheet

Features

- Backlit LED Mirror
- One touch switch with dimmer and memory function
- Energy efficient LED lighting 6500K, white color
- CRI 80+
- Includes Defogger, with push button
- MEANWELL brand LED driver (80W)
- Luminous: 4331LM

Construction

- Aluminum frame
- Quality polished edge mirror
- Single field wire installation
- Constructed for surface mounting
- Includes installation hardware

Codes/Standards Applicable

- SOHO Mirror is ETL certified to:
 - UL 962
 - CSA Standard C22.2 No. 250.0

Dimensions

Height: 30" (762 mm)
Width: 48" (1219 mm)

Depth: 1" (26 mm)

Electrical System


• INPUT: 110-240V~ 0.85A 50/60Hz

• OUTPUT: max.13V


Field Wire location as shown in drawing

Circuit Diagram



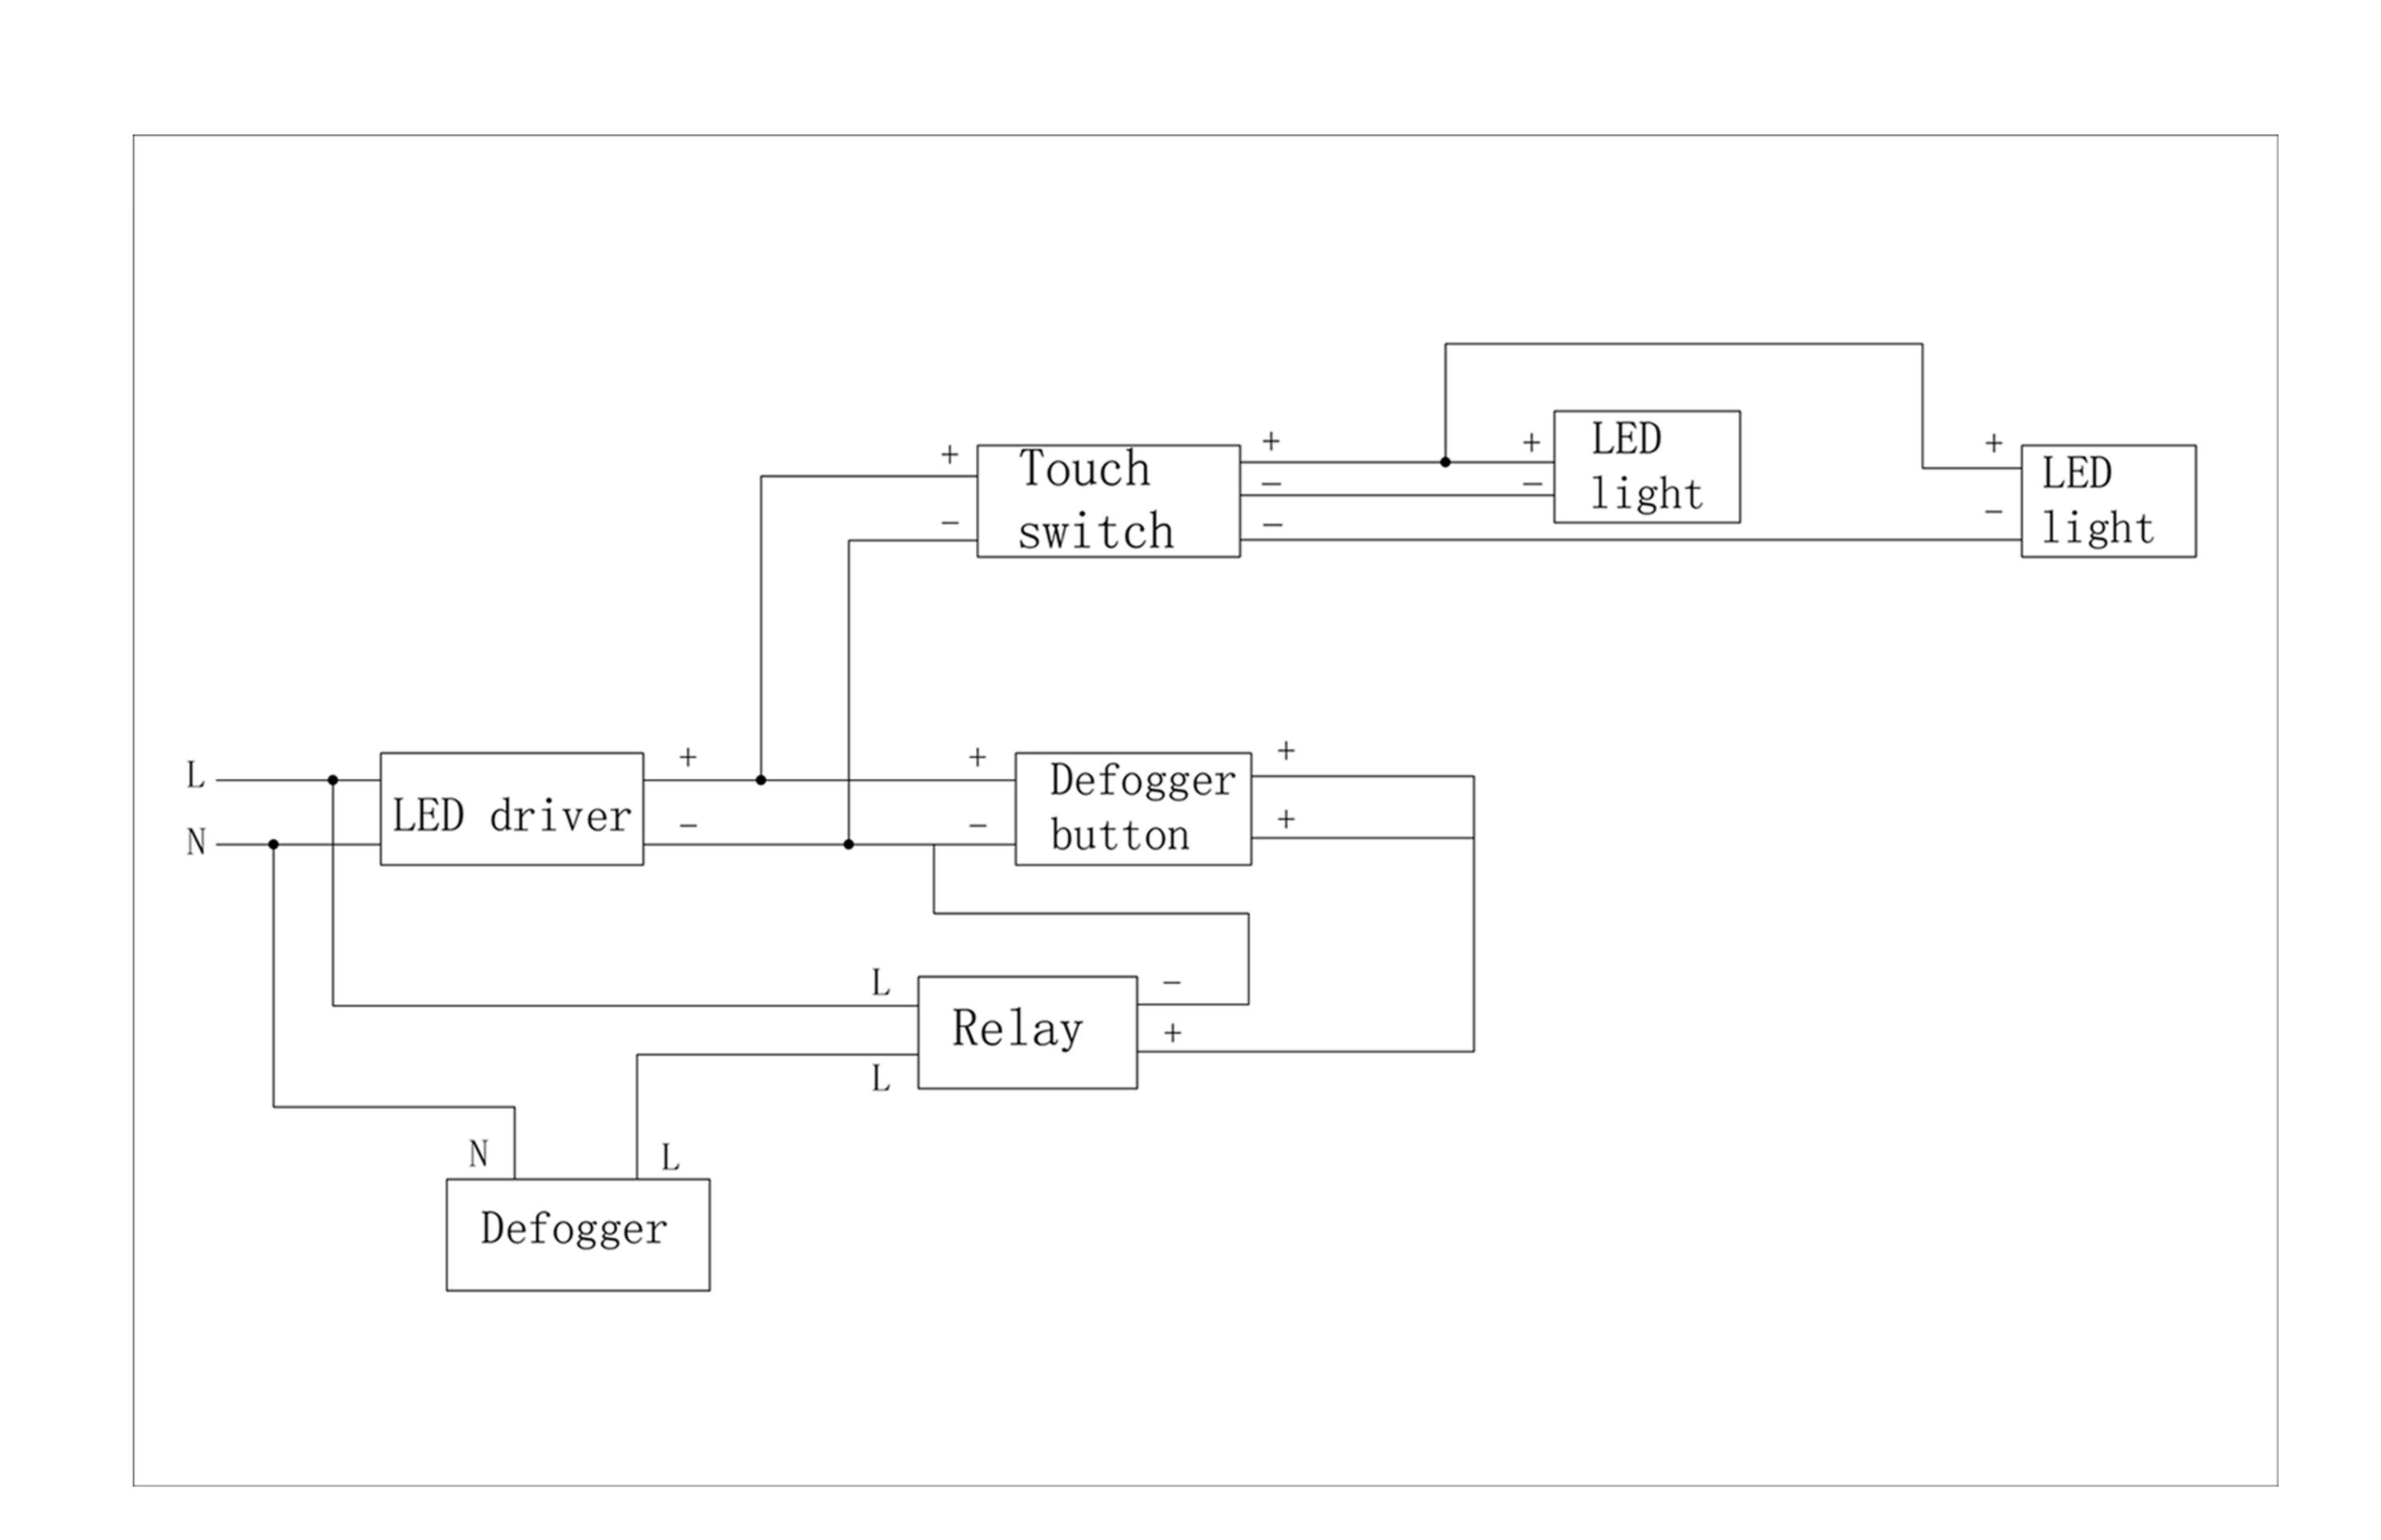


Circuit diagram

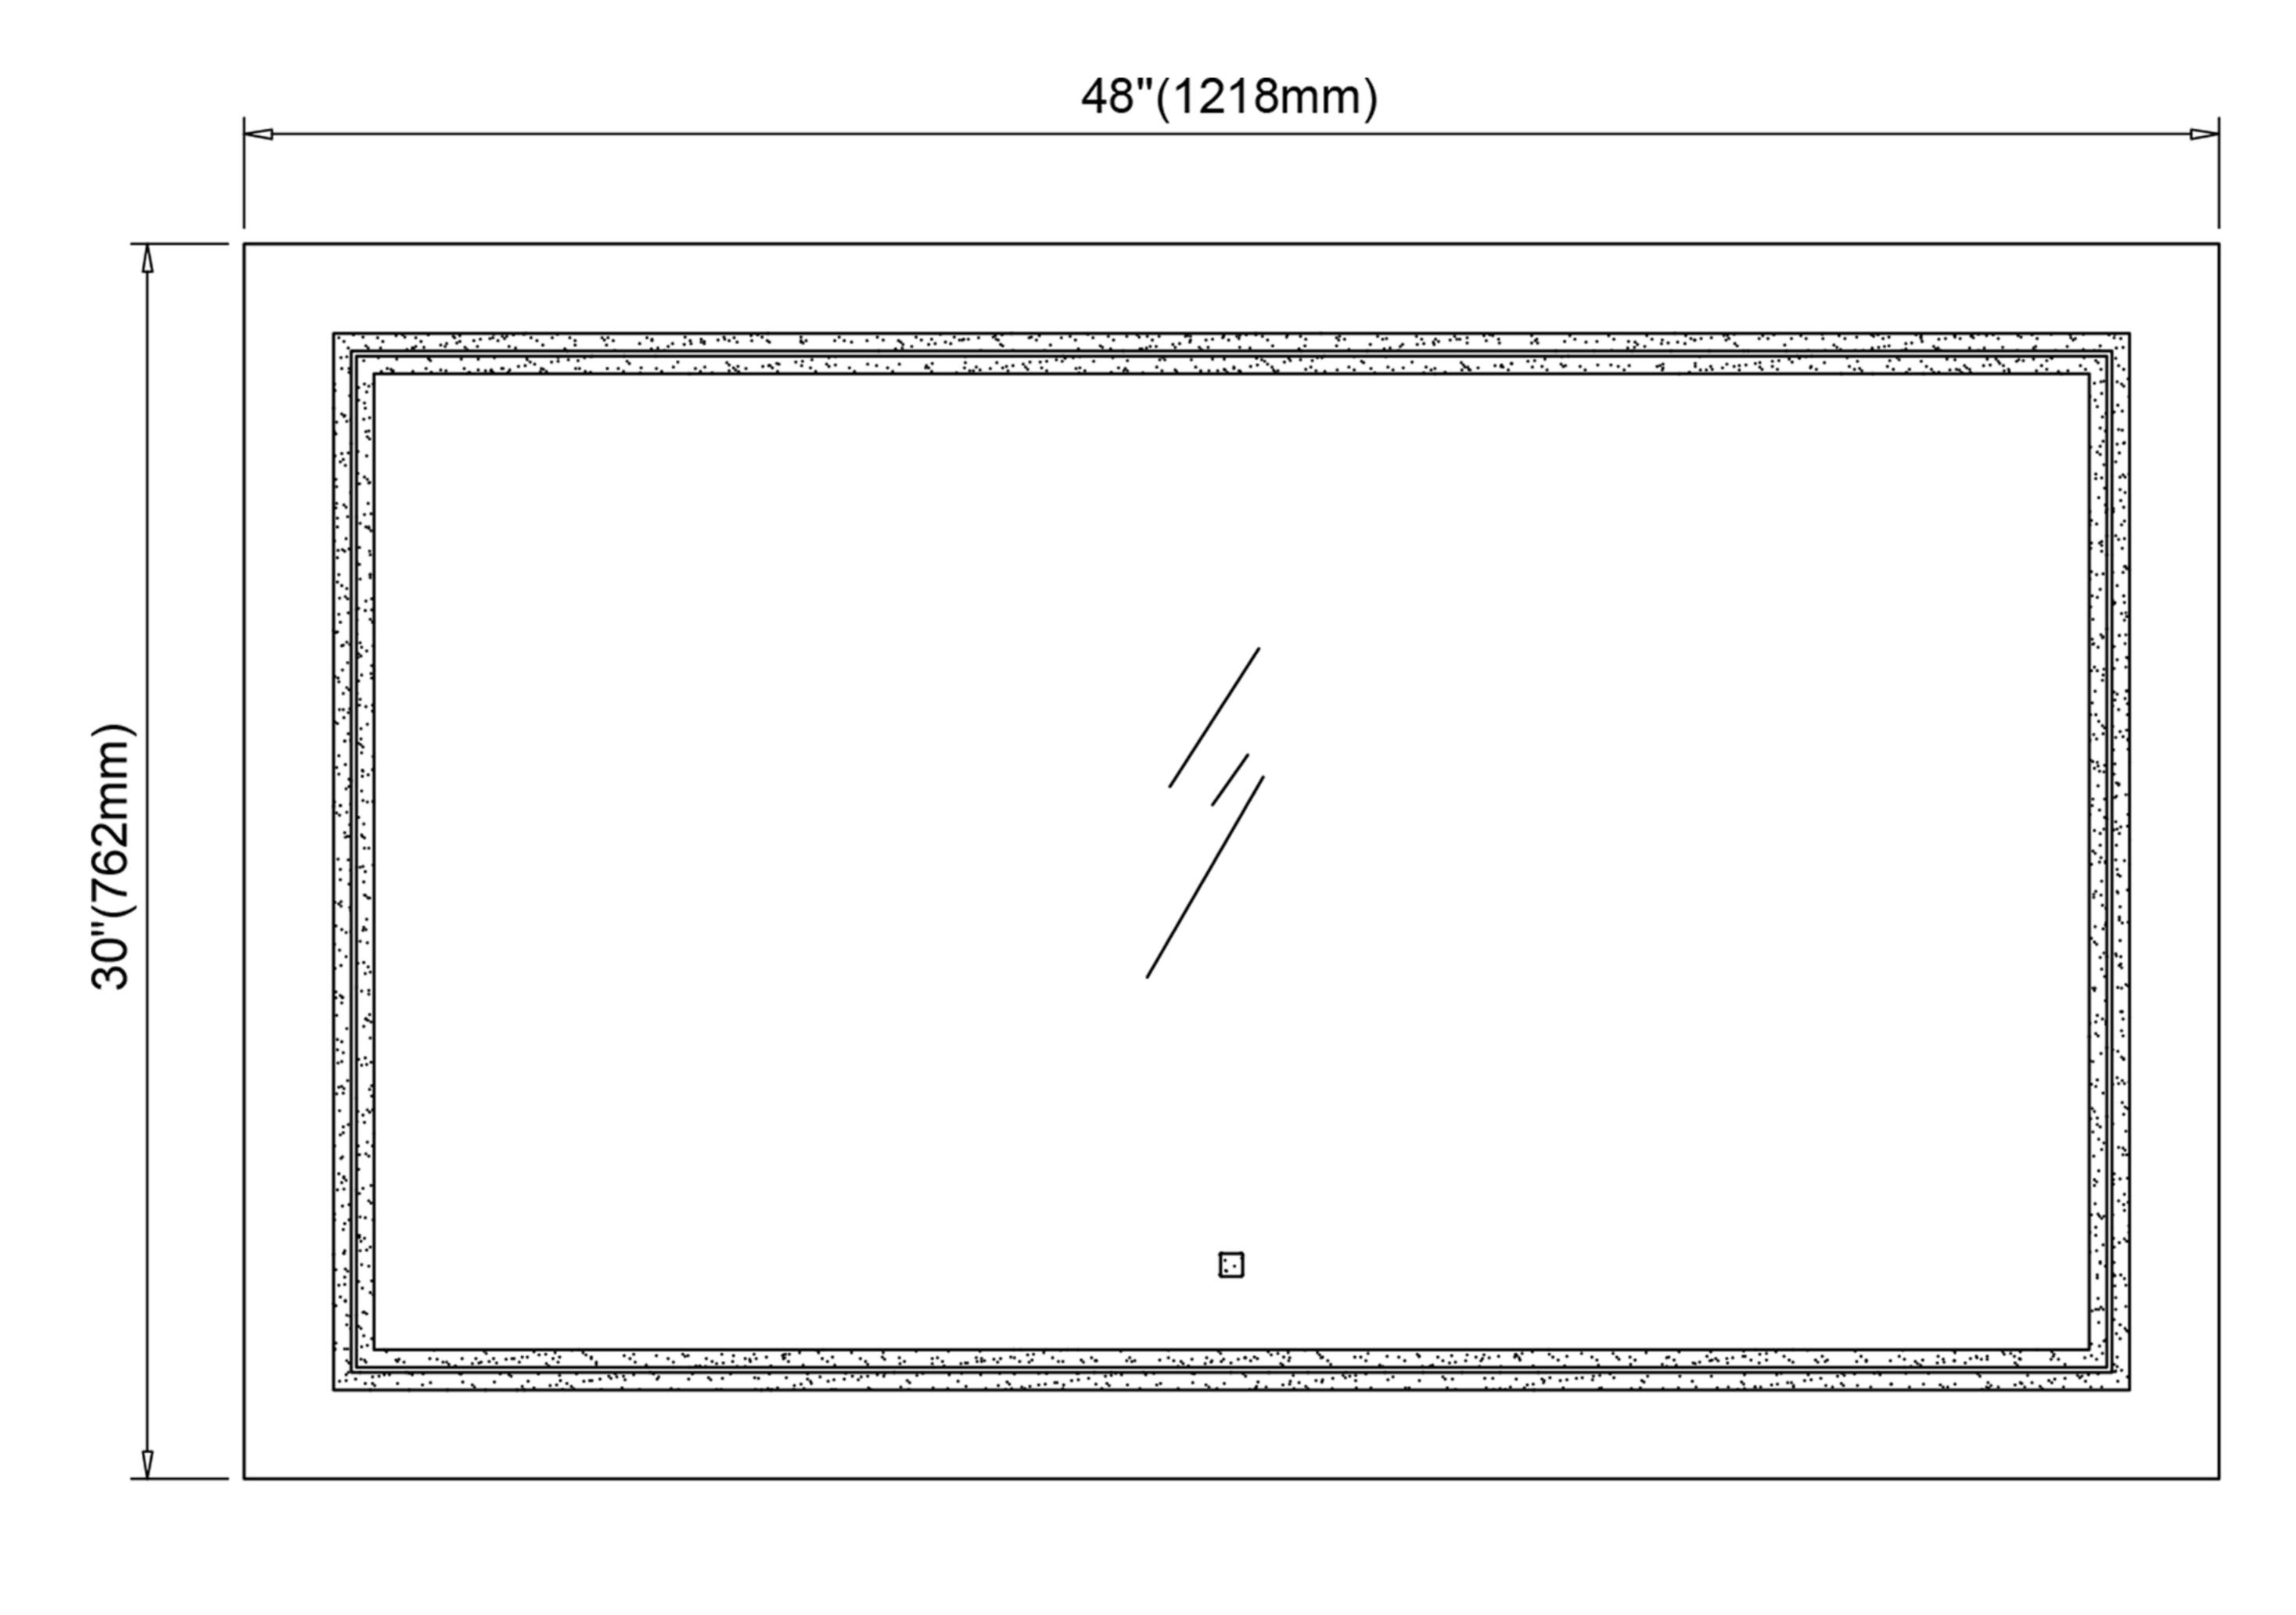



Front view

Side view

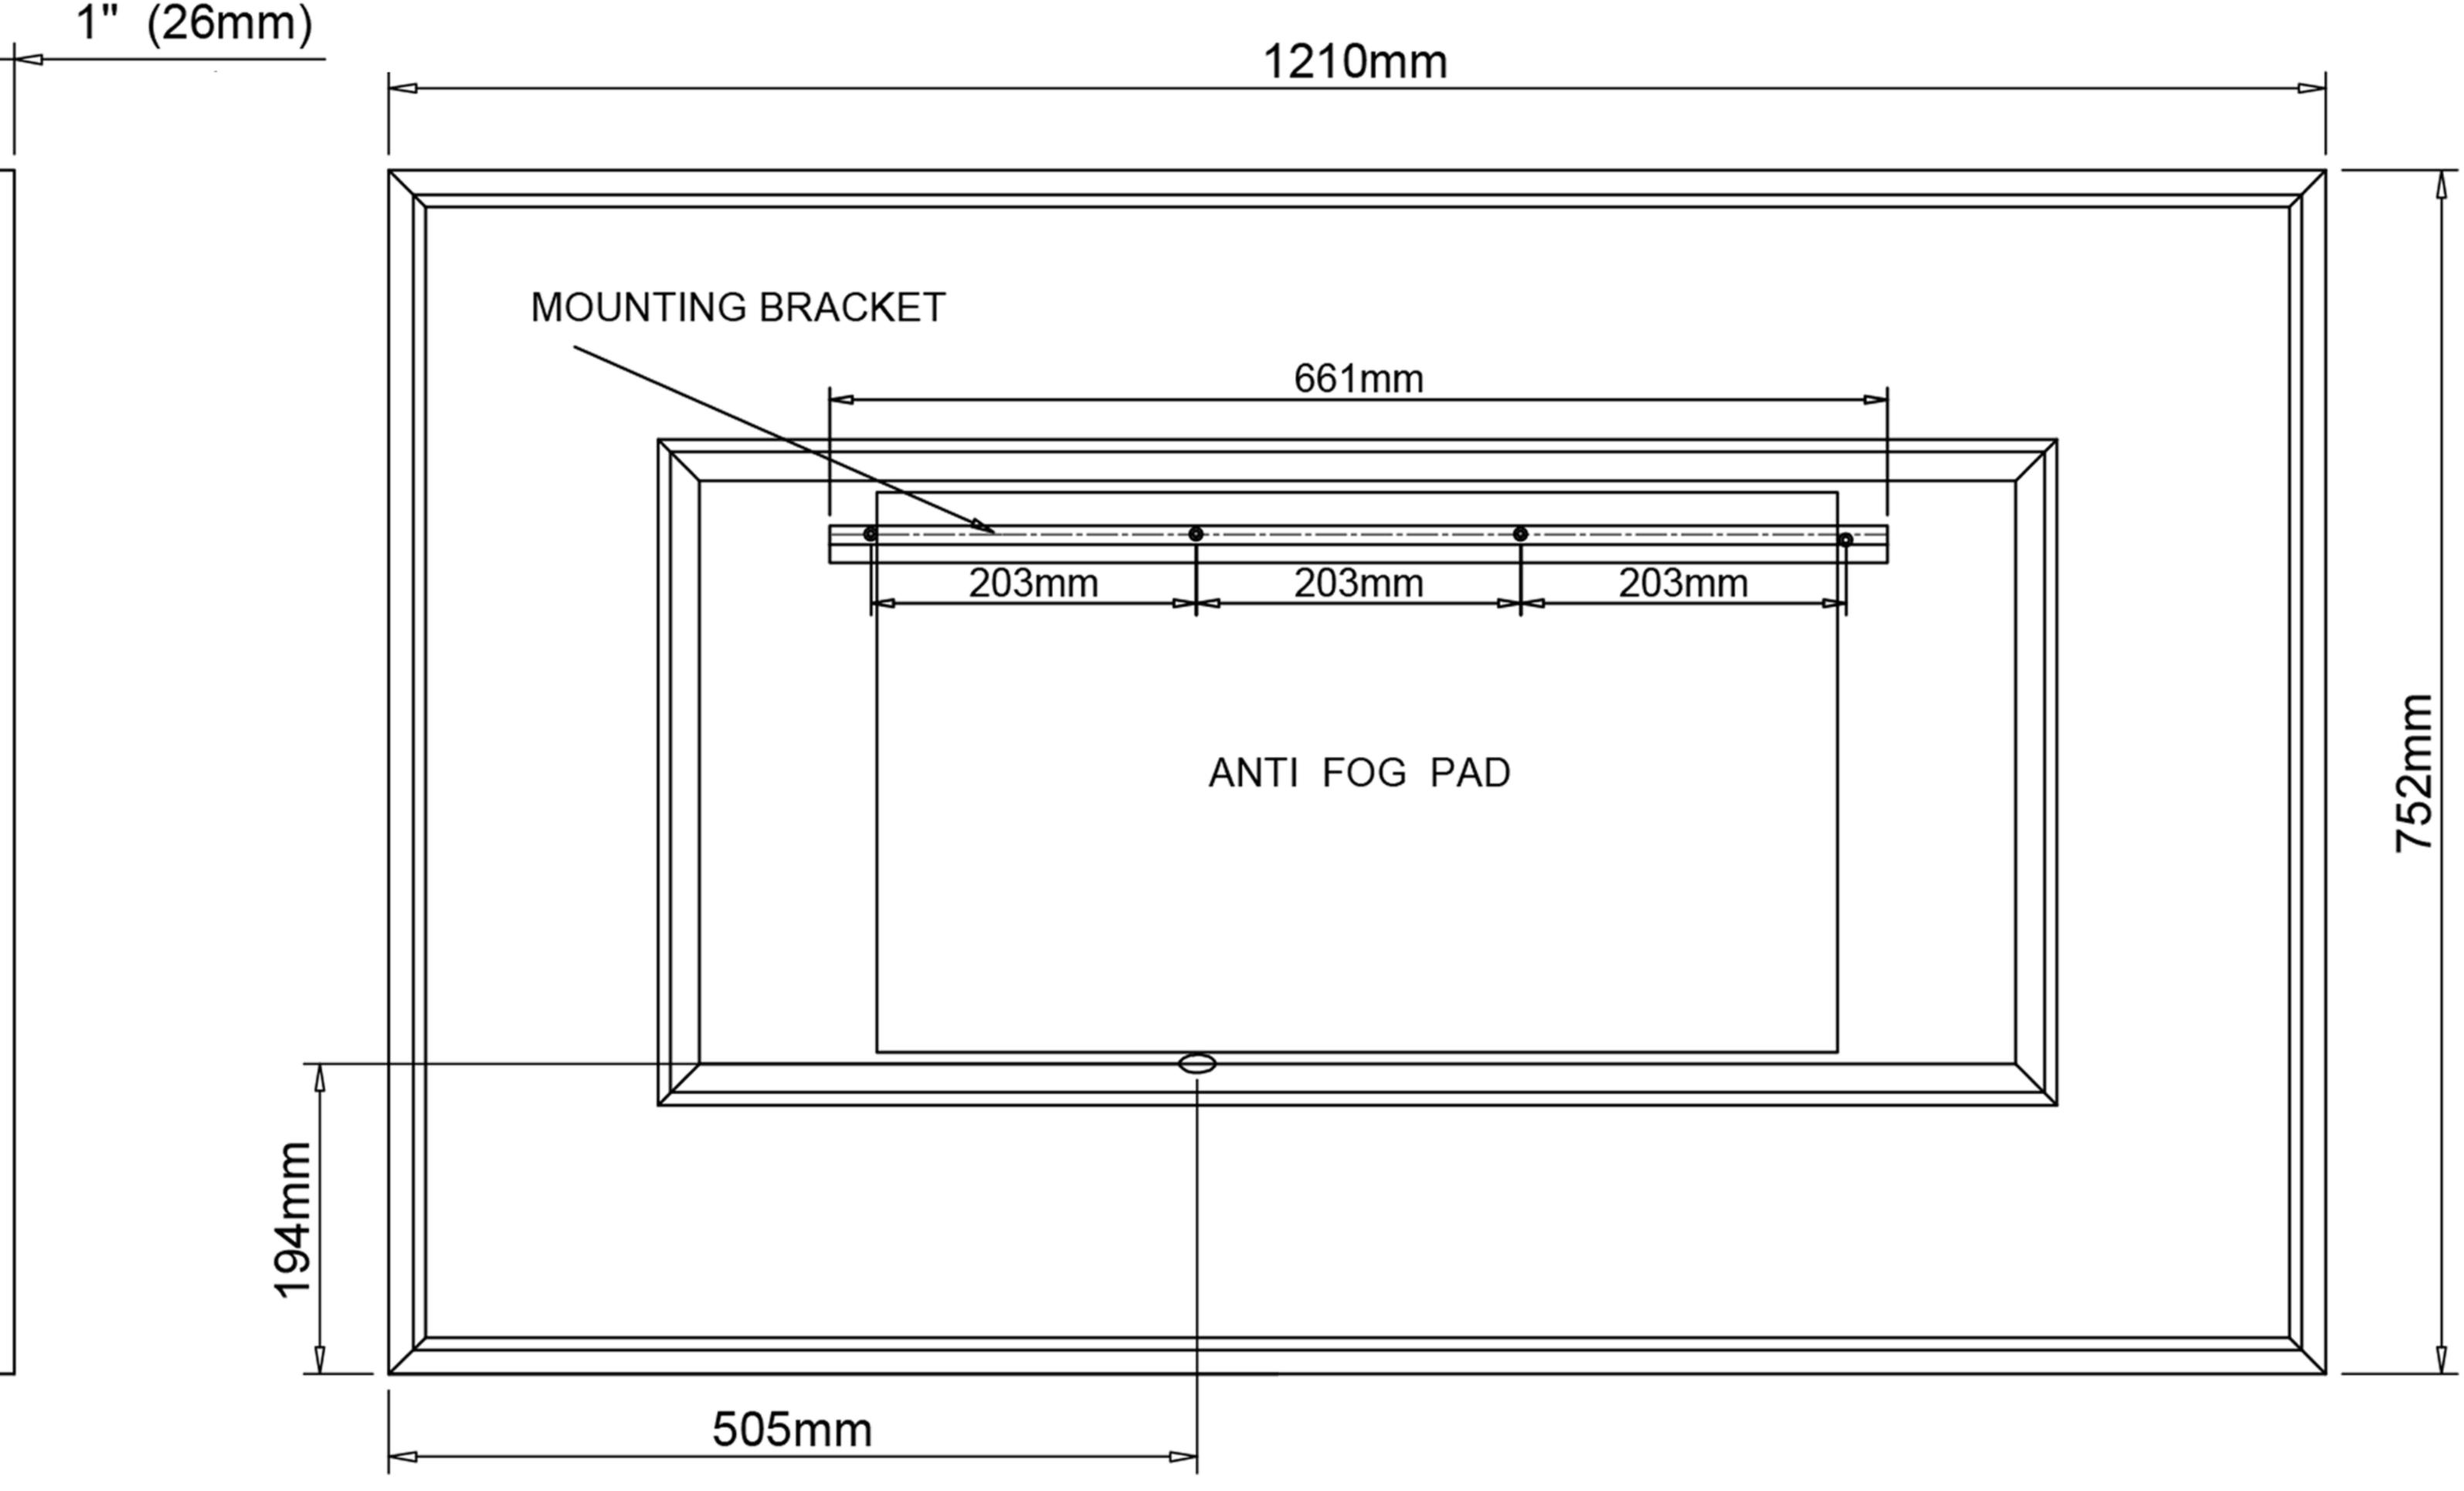

Back view for electrical knockout location





• Luminous: 4331LM

Electrical System



