



#### **Features**

**Defogger:** have your mirror fog free with a touch of a button. Dedicated defogger button is located along the frame on the inside of the cabinet.

**3X LED Lighted Magnifying Mirror:** A built-in, removable, LED-lighted magnifying mirror on the inside of the door, is vertically adjustable flip-out flat to accommodate users of varying heights.

**Dimmer:** Dim the light of your choice by holding down the on

button.

Digital Clock: modern and convenient feature.

**Electrical Outlets:** Dual electrical outlets with USB are located inside the cabinet.

**Light Control:** Cycle through the color temperature light with a tap of a dedicated button, 3 Color temperature lights. Warm, Cool, and Neutral.

**Inside Lighting:** the light sensor switches the interior light automatically.

Kelvin	6500
CRI	80+
Lumens*†	810
R9 Value*	50+
Watts (AC)	60
Lumens per Watt	90

### Construction

**BLUM Soft Close Hinges:** Soft Close hinges allow for a smooth and secure 110-155-degree opening.

Glass Shelves: 8mm clear adjustable glass shelves are included for you to arrange them according to your needs.

**Mirror:** Quality polished edge 5mm silver mirrored glass is used for the best front-surface reflexivity in the visible spectrum.

Interior: Double Sided Mirrored Doors and Back Wall.

Installation: Recessed or Surface Mount.

## **Codes/Standards Applicable**

**Electric Option Models are ETL certified to:** 

UL 962

CSA Standard C22.2 No.68

### **Dimensions**


Height: 32" (813 mm)


Width: 60" (1524 mm)

**Depth When surface mounted:** 5" (127 mm)

Depth When recessed: 1" (25mm)

60"W x 32"H x 5"D Triple Door

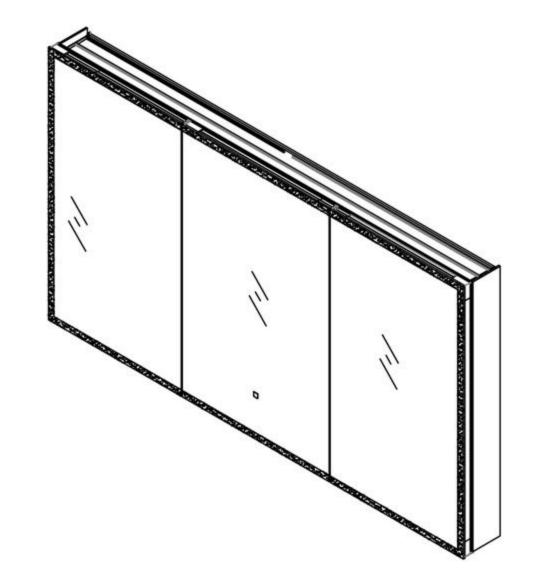

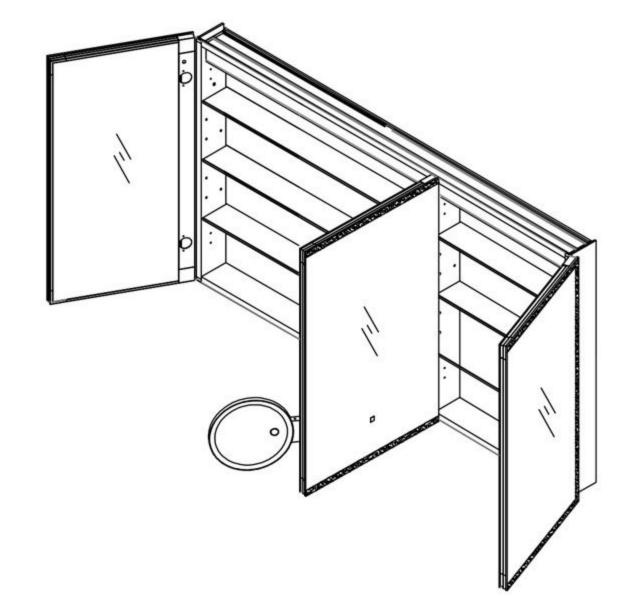


USA/Canada: 800-654-0016

## **Installation Options**


- Recessed Mount Rough Opening 31-1/3" H x 59-1/2" W x 4" D (795mm H x 1511mm W x 102mm D)
- Surface Mount Surface Mount Kit is included

# **Electrical System**

- 100 Watts LED Driver
- INPUT: 120VAC 60HZ 2.2A
- OUTPUT : 12VAC 8.5A
- Field wire location as shown in drawing
- 1/2" conduit (Ø 7/8" actual) electrical knockout location shown below
- Included field wire cable clamp
- Circuit Diagram

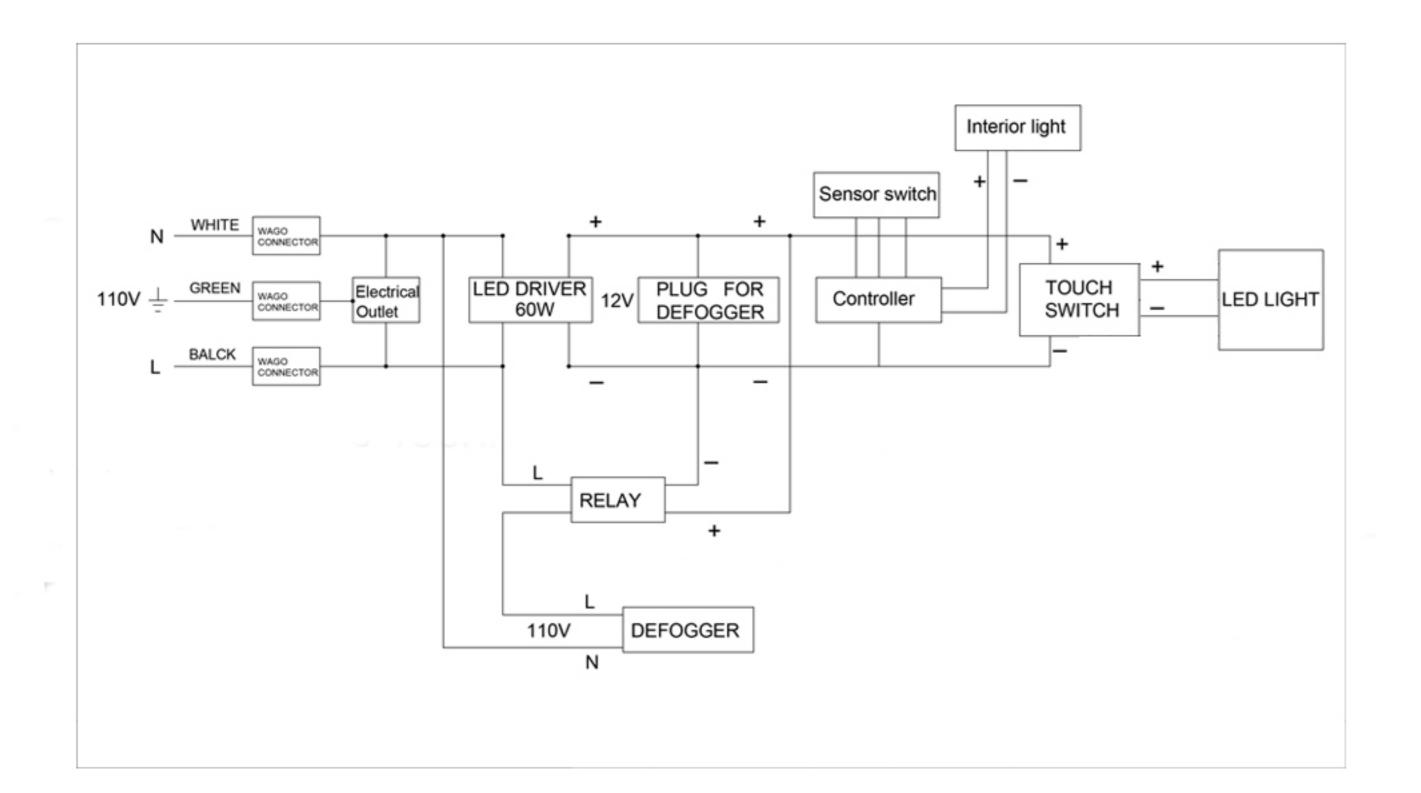


Circuit Diagram

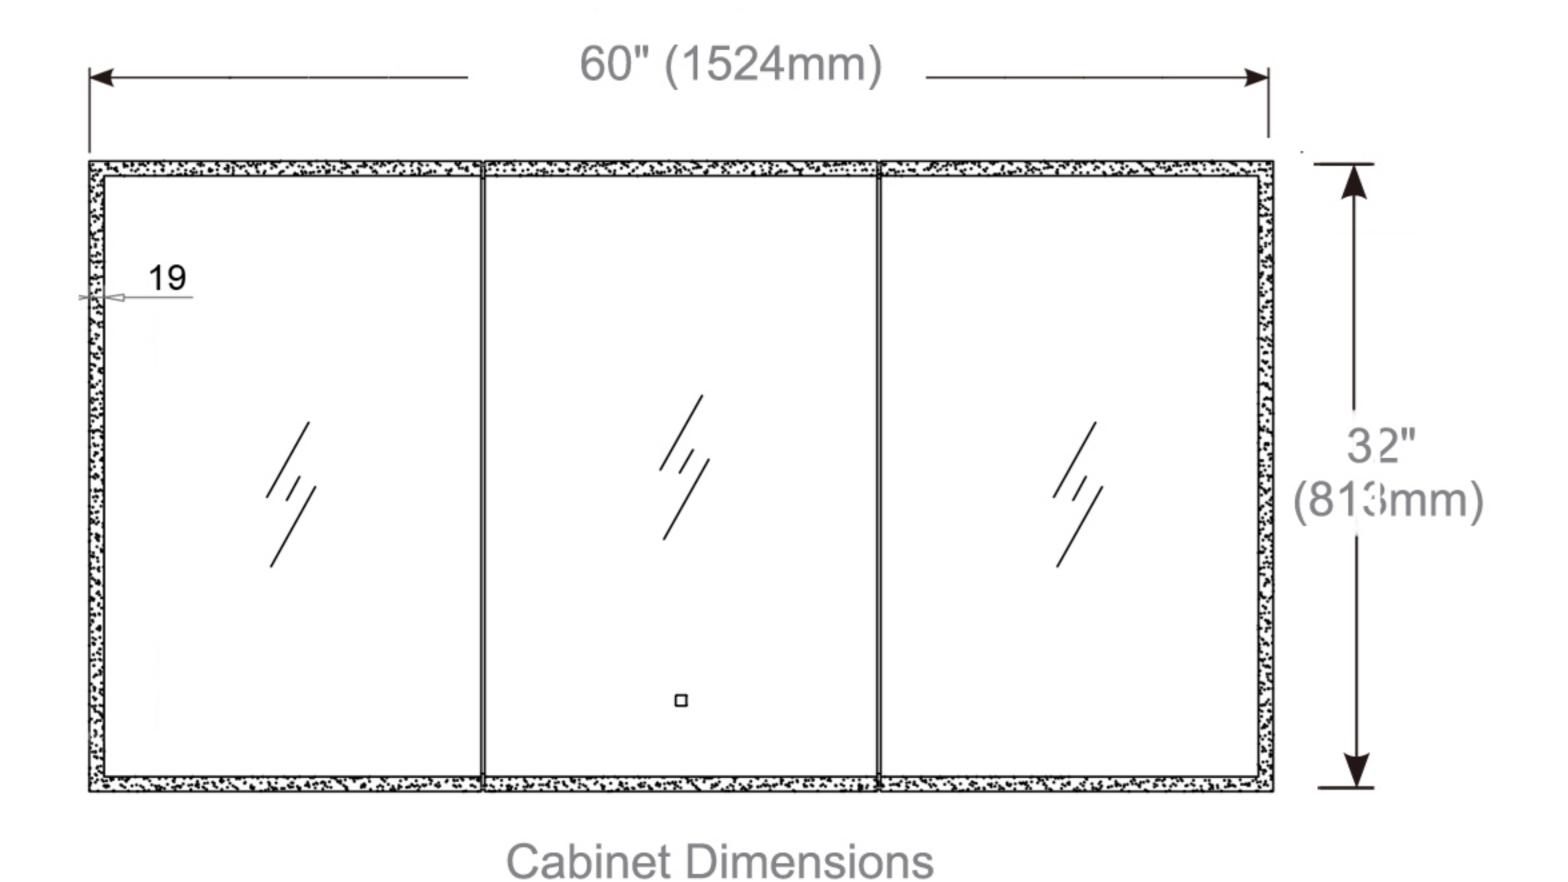


1-8/9" (47mm) ţ 4-1/3" (110mm)

Back of Cabinet - Wire Access Location

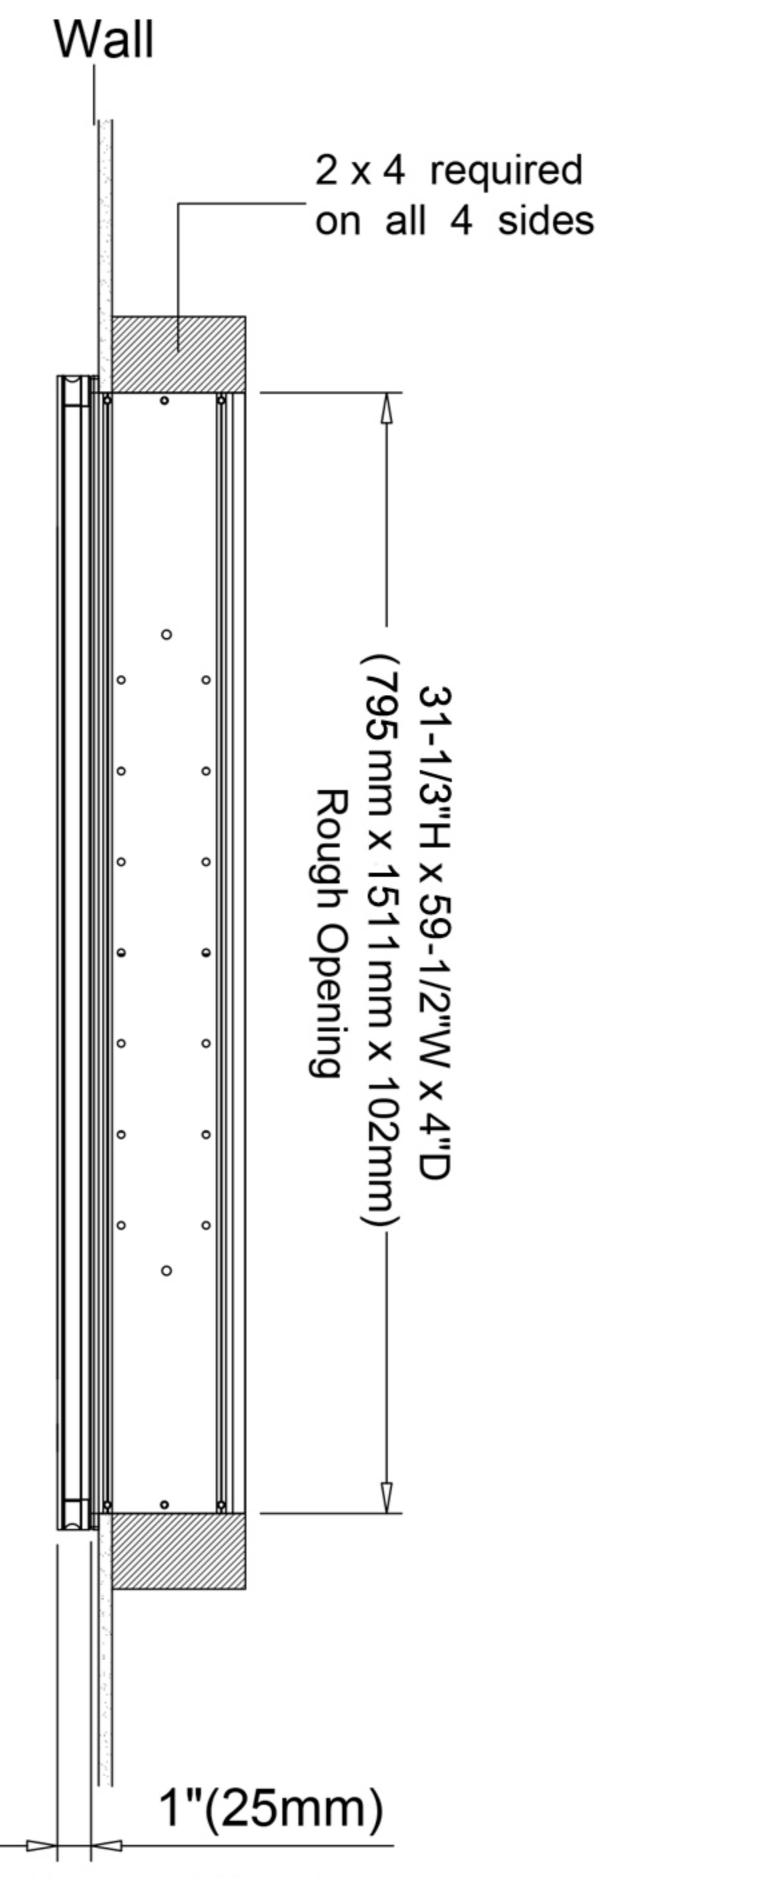



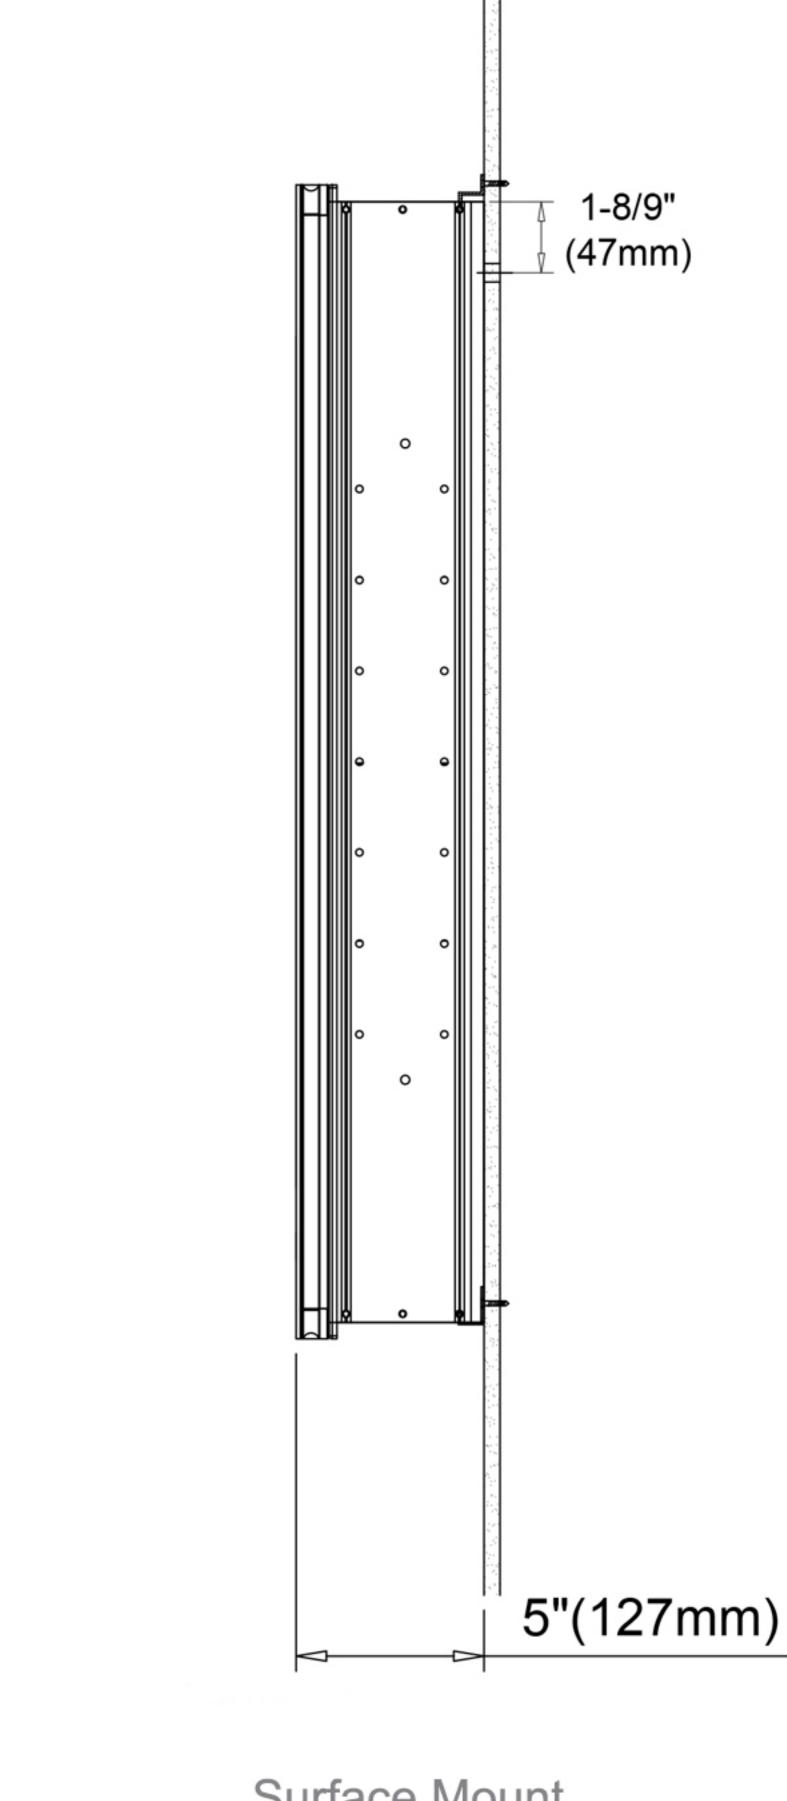


Wall

1-8/9"

(47mm)

**Surface Mount** 

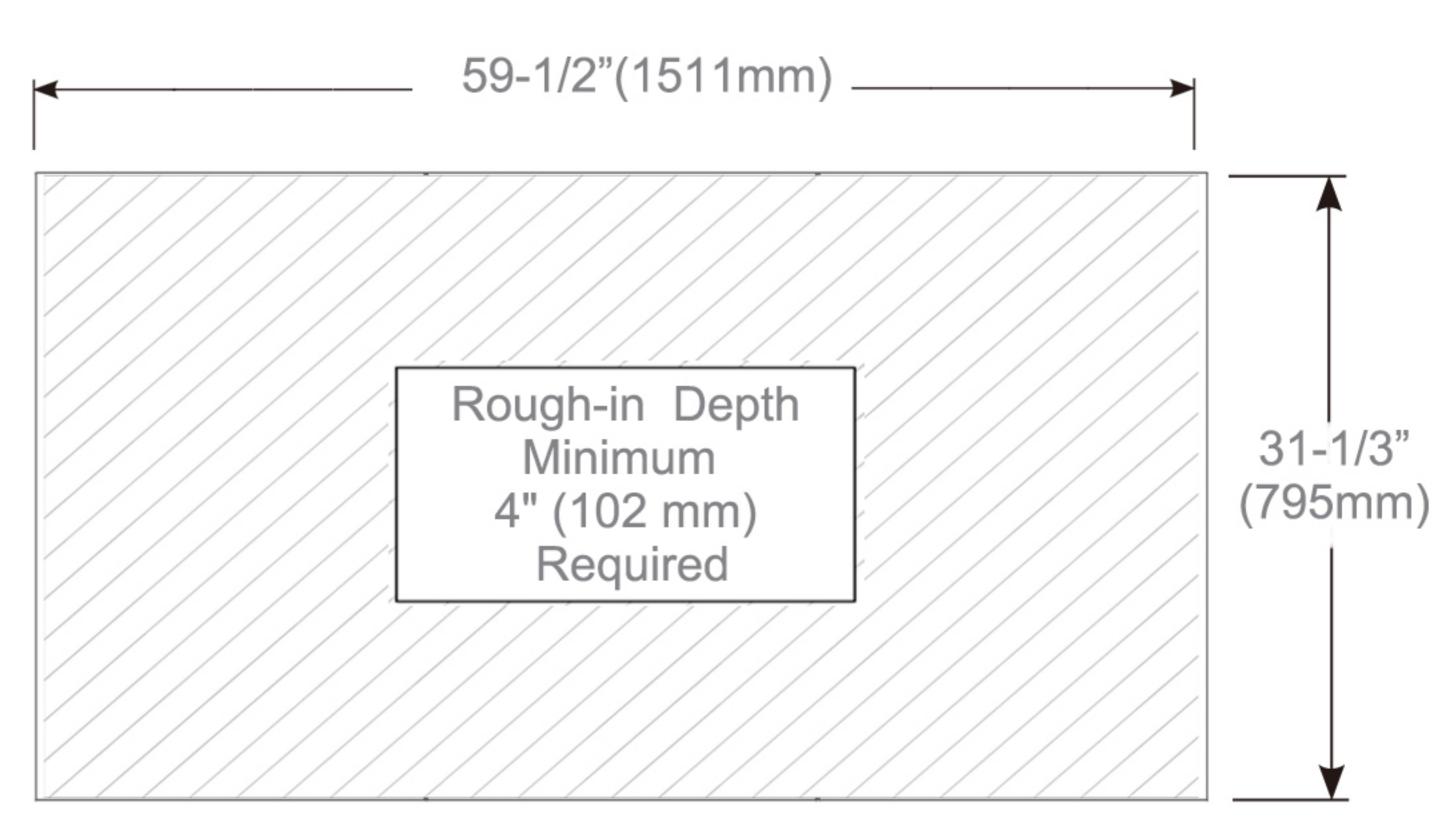

Rough-in Dimensions