

Royale - R-2440R-E- Specification Sheet

Features

Defogger: have your mirror fog free with a touch of a button. Dedicated defogger button is located along the frame on the inside of the cabinet.

3X LED Lighted Magnifying Mirror: A built-in, removable, LED-lighted magnifying mirror on the inside of the door, is vertically adjustable flip-out flat to accommodate users of varying heights.

Dimmer: Dim the light of your choice by holding down the on button.

Electrical Outlets: Dual electrical outlets with USB are located inside the cabinet.

Magnetic Organization: Utilize the magnetic area embedded in the cabinet rail to neatly arrange and keep small metal items easily accessible

Construction

BLUM Soft Close Hinges: Soft Close hinges allow for a smooth and secure 155-degree opening.

Glass Shelves: 8mm clear adjustable glass shelves are included for you to arrange them according to your needs.

Mirror: Quality polished edge 5mm silver mirrored glass is used for the best front-surface reflexivity in the visible spectrum.

Interior: Double Sided Mirrored Doors and Back Wall.

Installation: Recessed or Surface Mount.

Codes / Standards Applicable

Electric Option Models are ETL certified to:

UL 962

CSA Standard C22.2 No.68

Dimensions

Height: 40" (1016 mm)

Width: 24" (609 mm)


Depth When surface mounted: 5" (127 mm)

Depth When recessed: 1" (25mm) 24"W x 40"H x 5"D Right Hinge

Installation Options

Recessed Mount: Rough Opening 23-1/2" W x 39-1/2" H x 4" D

Surface Mount: Surface Mount Kit is included

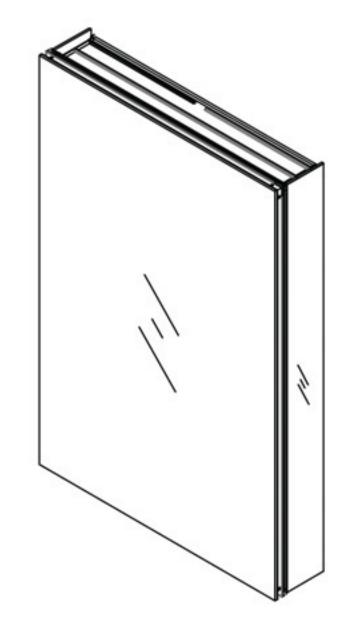



USA/Canada: 800-654-0016

Electrical System Wall Wall • INPUT: 110VAC 2X4 required on all 4 sides • OUTPUT: 110VAC Field wire location as shown in drawing • 1/2" conduit (Ø 7/8" actual) electrical knockout location shown below Included field wire cable clamp Circuit Diagram WHITE WAGO CONNECTOR Electrical 110V <u></u> WAGO CONNECTOR Outlet BALCK WAGO CONNECTOR 5"(127mm) **Surface Mount Circuit Diagram Recessed Mount** 24" (608mm) — → 23-1/2"(597mm) **-**24" (608mm) -39-1/2" (1003mm) 40" (1016mm) 40" (1016mm) Rough-in Depth Minimum 4" (102mm) Required - 9-5/7"-(247mm) 4-1/2" ┥(114mm) Rough-in Dimensions **Cabinet Dimensions** Back of Cabinet - Wire Access Location