

Royale Plus - RP3-3630 - Specification Sheet

Features

Defogger: have your mirror fog free with a touch of a button. Dedicated defogger button is located along the frame on the inside of the cabinet.

3X LED Lighted Magnifying Mirror: A built-in, removable, LED-lighted magnifying mirror on the inside of the door, is vertically adjustable flip-out flat to accommodate users of varying heights.

Dimmer: Dim the light of your choice by holding down the on button. **Digital Clock:** modern and convenient feature.

Electrical Outlets: Dual electrical outlets with USB are located inside the cabinet.

Light Control: Cycle through the color temperature light with a tap of a dedicated button, 3 Color temperature lights. Warm, Cool, and Neutral.

Inside Lighting: the light sensor switches the interior light automatically.

Kelvin	6500
CRI	+08
Lumens*†	1620
R9 Value*	50+
Watts (AC)	60
Lumens per Watt	90

Construction

BLUM Soft Close Hinges: Soft Close hinges allow for a smooth and secure 110-155-degree opening.

Glass Shelves: 8mm clear adjustable glass shelves are included for you to arrange them according to your needs.

Mirror: Quality polished edge 5mm silver mirrored glass is used for the best front-surface reflexivity in the visible spectrum.

Interior: Double Sided Mirrored Doors and Back Wall.

Installation: Recessed or Surface Mount.

Codes/Standards Applicable

Electric Option Models are ETL certified to:

UL 962

CSA Standard C22.2 No.68

Dimensions


Height: 30" (762 mm)


Width: 36" (915 mm)

Depth When surface mounted: 5" (127 mm)

Depth When recessed: 1" (25mm)

36"W x 30"H x 5"D Triple Door

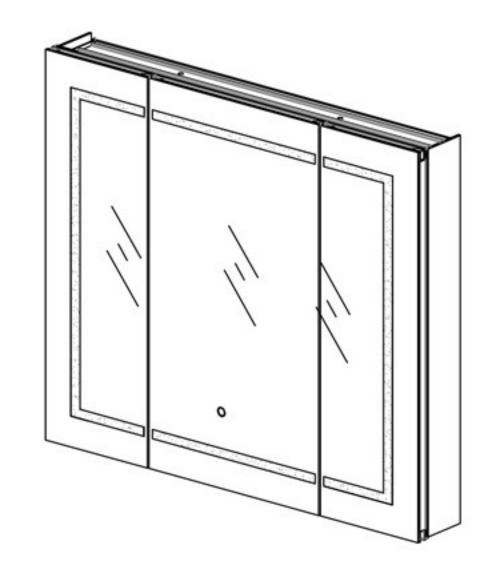

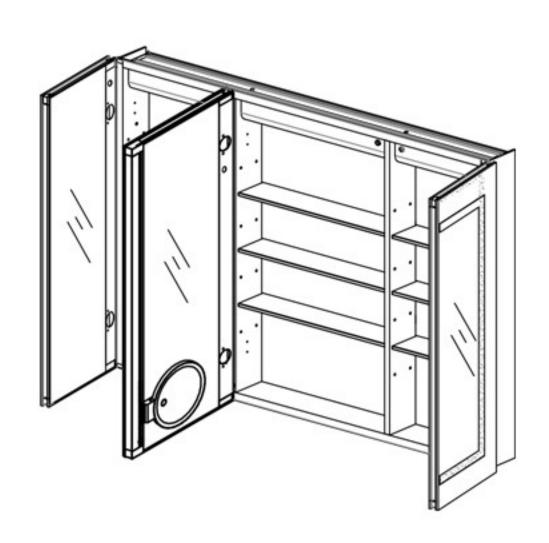


Installation Options


- Recessed Mount Rough Opening 29-1/2" H x 35-1/2" W x 4" D
 (749mm H x 901mm W x 102mm D)
- · Surface Mount Surface Mount Kit is included

Electrical System


- 60 Watts LED Driver
- INPUT: 120VAC 60HZ 1.2A
- OUTPUT: 12VAC 5.0A
- · Field wire location as shown in drawing
- 1/2" conduit (Ø 7/8" actual) electrical knockout location shown below
- · Included field wire cable clamp
- Circuit Diagram

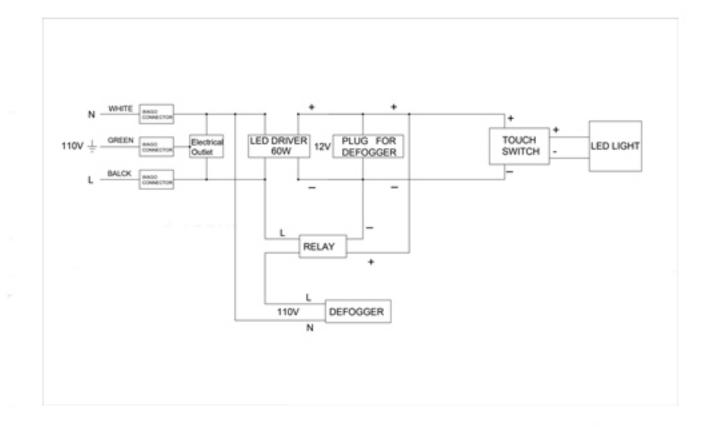

Circuit Diagram

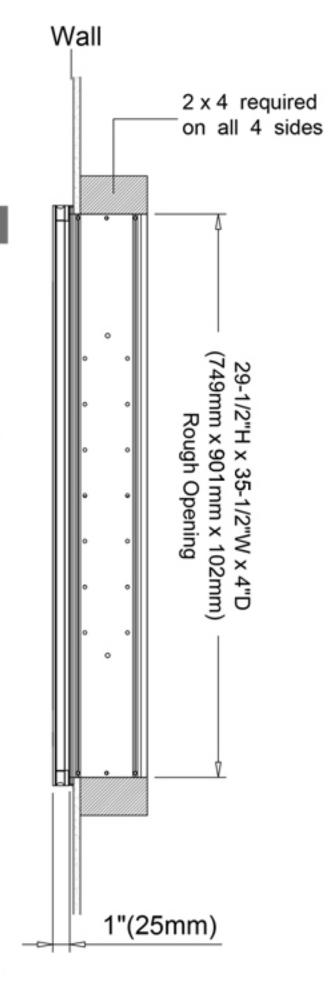


Recessed Mount

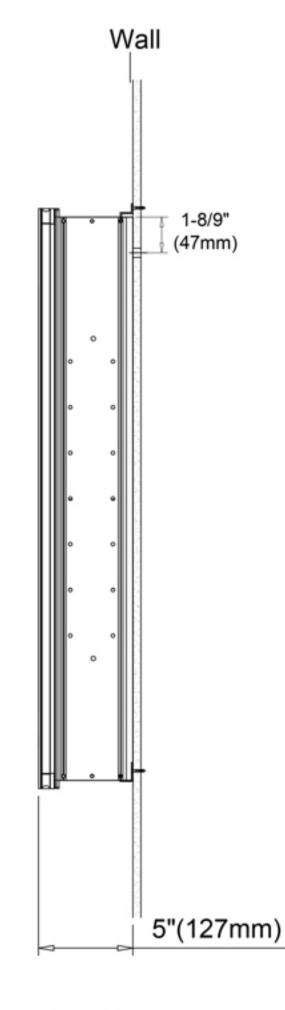

Surface Mount

1-8/9" (47mm)

4-1/3" (110mm)

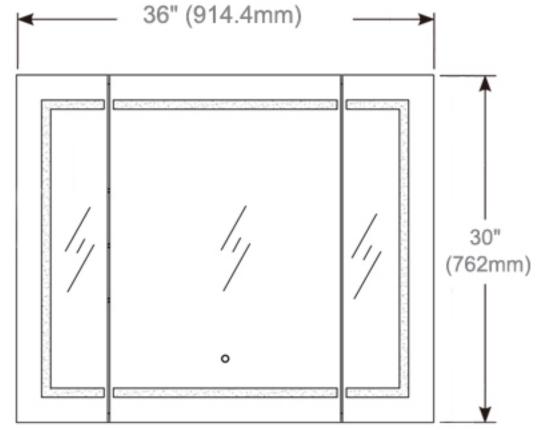

Rough-in Depth Minimum 4" (102 mm) Required (749mm)

Cabinet Dimensions

Rough-in Dimensions

Back of Cabinet - Wire Access Location